


ROULE INGROUND LIGHT RUL-135 MONO SPEC SHEET

RUL-135



YYZ Roule inground recessed uplight ideal in exterior lobby entrances as highlight or to be used as uplight for walls and columns. These buried LED lighting fixture made in stainless steel features symmetrical light distribution and hence will create a beautiful ambiance & enhance the environment. The fixtures are versatile which can add a visual impact and also plays a critical role in safety apart from lighting.

SPECIFICATION

	SMD Mono	COB Mono
OPERATING VOLTAGE	110-240V AC, 24V DC, 48V DC	
RATED POWER	6W, 8W, 10W, 12W	6W, 8W, 10W, 12W
LIGHT SOURCE	Cree SMD	Cree COB
LED QUANTITY	3 LEDs	1 LEDs
CCT	2200K, 2700K, 3000K, 3500K 4000K, 5000K, 6500K, Red, Green, Blue, Yellow, Amber	2200K, 2700K, 3000K, 3500K 4000K, 5000K, 6500K
BEAM ANGLE	5°, 8°, 10°, 12°, 20°, 25°, 30°, 40°, 45°, 60°, 10°x22°, 15°x55°, 20°x60°	15°, 24°, 36°, 60°
CRI	80, 90	
LAMP LIFE	50,000 hrs	
CONTROLS	Switched, TRIAC, 0-10V, DALI	
FIXTURE DIMENSION	Ø5.31 x 5.67 inches (Ø135 x 144 mm)	
SLEEVE DIMENSION	Ø4.92 x 6.10 inches (Ø125 x 155 mm)	
BODY MATERIAL	Die-cast aluminum	
LENS MATERIAL	Tempered glass	
BEZEL MATERIAL	Stainless steel	
SLEEVE MATERIAL	ABS	
BEZEL COLOR FINISH	Silver, customed*	
BEZEL SHAPE OPTIONS	Round, square	
MOUNTING	Floor recessed	
OPERATING TEMP	-20°C to +50°C	
STORAGE TEMP	-20°C to +60°C	
CLASS RATING	Class I	
IP RATING	IP67	
IK RATING	IK10	




SMD + Lens

COB + Lens

V 110~240V AC, 24V DC, 48V DC
Working Voltage

W 6W, 8W, 10W, 12W
Rated power

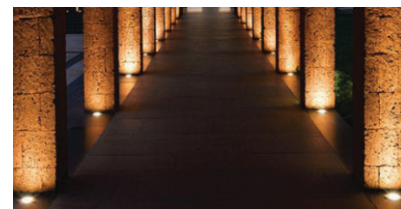

Application image

BEZEL SHAPES



Round Bezel




Square Bezel



Mounting Sleeve


DIFFUSER OPTIONS




Filter



Textured Diffusion



Elliptical (Asymmetric)
Diffuser



Honeycomb lover



Round-meshed grill
& Light Control Cup

MOUNTING SLEEVE

ACCESSORIES OPTIONS

ROULE INGROUND LIGHT RUL-135 MONO SPEC SHEET

RUL-135



ORDERING CODE

SMD

PRODUCT SERIES	SIZE	NO. LED	POWER	COLOR TEMPERATURE	CONTROL	CRI	BEAM ANGLE	VOLTAGE	BEZEL SHAPE	BEZEL COLOR	DIFFUSER	ACCESSORIES
RUL - Roule	135 - Ø135mm	3 - 3 SMD	6W - 6 Watts 8W - 8 Watts 10W - 10 Watts 12W - 12 Watts	CT22 - 2200K CT27 - 2700K CT30 - 3000K CT35 - 3500K CT40 - 4000K CT50 - 5000K CT65 - 6500K RE - Red GR - Green BL - Blue YE - Yellow AM - Amber	SW - Switch DM - 0-10 Dim TRI - Triac DA - DALI	80 - CRI 80 90 - CRI 90	5D - 5° 8D - 8° 10D - 10° 12D - 12° 20D - 20° 25D - 25° 30D - 30° 40D - 40° 45D - 45° 60D - 60° 10x22D - 10°x22° 15x55D - 15°x55° 20x60D - 20°x60°	AC - 110-240VAC 24V - 24V DC 48V - 48V DC	R - Round Q - Square	SL - Silver XX - Custom	N - None F - Filter TD - Textured ED - Elliptical	N - None F - Honeycomb LC - Light control cup

Sample: RUL-135-3-6W-CT22-SW-80-5D-AC-R-SL-N-N

COB

PRODUCT SERIES	SIZE	NO. LED	POWER	COLOR TEMPERATURE	CONTROL	CRI	BEAM ANGLE	VOLTAGE	BEZEL SHAPE	BEZEL COLOR	DIFFUSER	ACCESSORIES
RUL - Roule	135 - Ø135mm	1 - 1 COB	6W - 6 Watts 8W - 8 Watts 10W - 10 Watts 12W - 12 Watts	CT22 - 2200K CT27 - 2700K CT30 - 3000K CT35 - 3500K CT40 - 4000K CT50 - 5000K CT65 - 6500K	SW - Switch DM - 0-10 Dim TRI - Triac DA - DALI	80 - CRI 80 90 - CRI 90	15D - 15° 24D - 24° 36D - 36° 60D - 60°	AC - 110-240VAC 24V - 24V DC 48V - 48V DC	R - Round Q - Square	SL - Silver XX - Custom	N - None F - Filter TD - Textured ED - Elliptical	N - None F - Honeycomb LC - Light control cup

Sample: RUL-135-1-6W-CT22-SW-80-15D-AC-R-SL-N-N

DIMENSION

